


# DUAL-FLEX MARINE & INDUSTRIAL ENGINE VIBRATION ISOLATORS DF-475-M3 SERIES

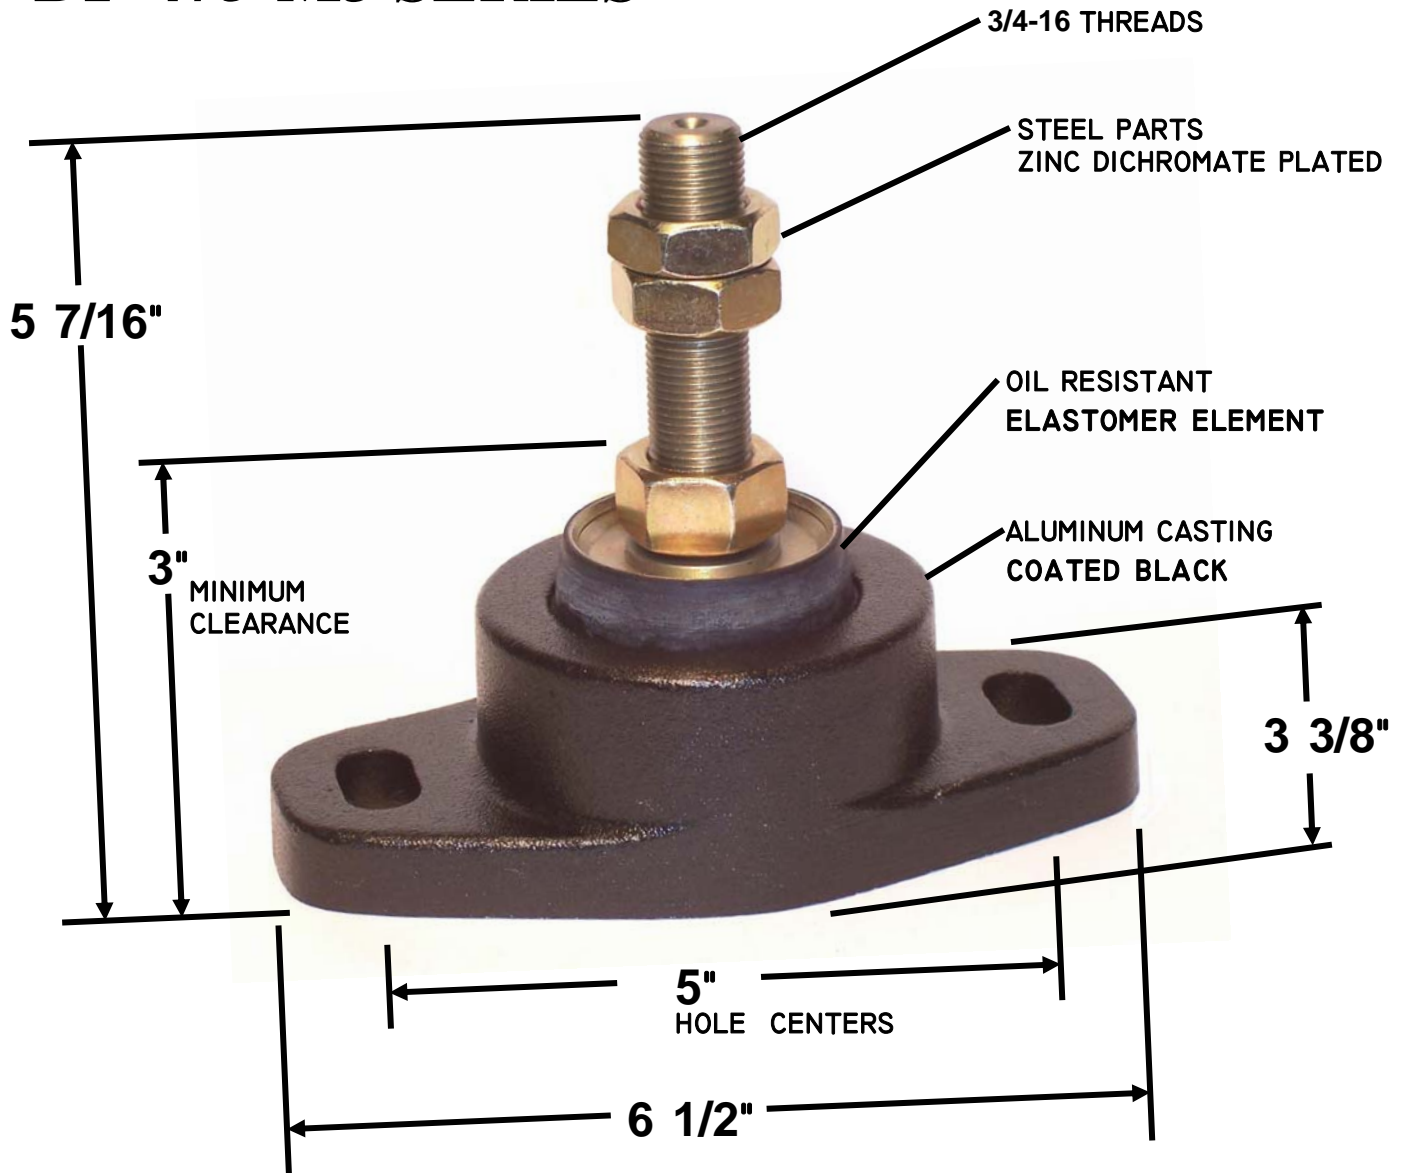

Manufactured in U.S.A.

## DF-475-M3 SERIES

The (“Dual Flex”) DF-475-M3 Series of heavy duty mountings is designed principally for diesel engines in the 950 – 2,000 lb. range. Base casting features heavy duty aluminum alloy construction, with lip incorporated in the top of the casting to resist the upward pull of the engine – coated black to resist corrosion. Durable oil and fuel resistant elastomer element. Low profile mount - requires only 3” minimum clearance from casting base to top of leveling nut. True floating mount

with fail safe design - bottom cast base pad prevents excessive impact. Easy installation with 3/4" threaded stud for vertical height and slotted casting for horizontal adjustment. Mounts come complete - furnished with three nuts: leveling, locking and secondary lock. Aluminum base cast with 1/2" slotted holes for 1/2" bolts or lag screws. All steel parts are zinc dichromate plated for corrosion resistance. Available in three size ratings (shown below) dependant on engine/powertrain package weight.

<b>SUGGESTED MOUNTINGS</b>	
<b>ENGINE WEIGHTS</b>	<b>4 POINT MOUNTINGS</b>
950 to 1,200 lbs.	DF-475-M3
1,200 to 1,600 lbs.	DF-477-M3
1,600 to 2,000 lbs.	DF-478-M3

The Bushings, Inc. "Dual Flex" Marine Engine Mount design provides outstanding vibration isolation control across the three (longitudinal, lateral, and vertical) fields of vibratory motion. Construction of the mount gives a soft cushioning effect under normal loads, as mount loads increase across the operating range, shear resistance grows quickly providing smooth operation with a small amount of deflection.



## **BUSHINGS, INC.**

**1967 Rochester Industrial Drive  
Rochester Hills, Michigan 48309-3340  
Phone:(248)650-0603 Fax:(248)650-0606  
www.bushingsinc.com**

